





Crane Materials International

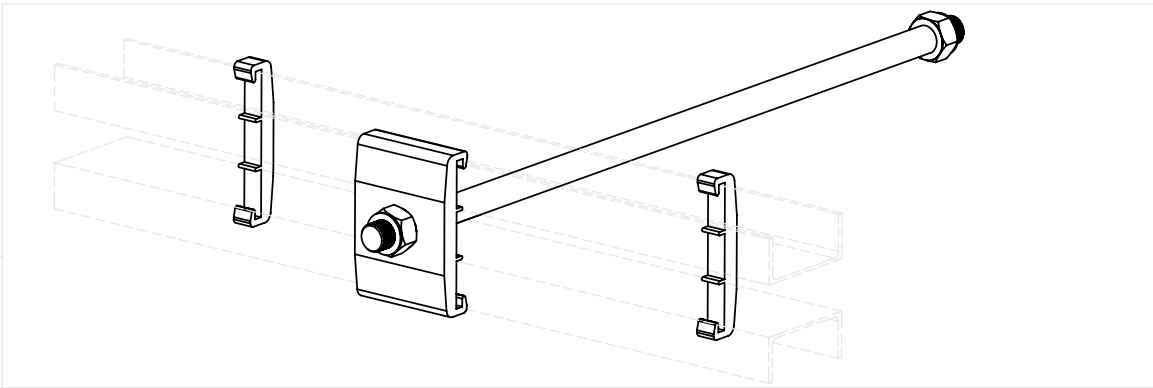

Drawn: JAB
Date: 12/27/06
WB-6, WB-8 Rod Kit

Available Diameters	Max System Tensile Force (FOS 1.95)		System Lengths	
1 1/8"	14,869 lb	66,141 N	20 ft, 24 ft, 30 ft	6.1 m, 7.3 m, 9.1 m
1 1/4"	18,883 lb	83,996 N	20 ft, 24 ft, 30 ft	6.1 m, 7.3 m, 9.1 m
1 1/2"	27,379 lb	121,788 N	20 ft, 24 ft, 30 ft	6.1 m, 7.3 m, 9.1 m
1 3/4"	37,026 lb	164,700 N	24 ft, 28 ft, 32 ft	7.3 m, 8.5 m, 9.8 m
2"	48,718 lb	216,708 N	24 ft, 28 ft, 32 ft	7.3 m, 8.5 m, 9.8 m

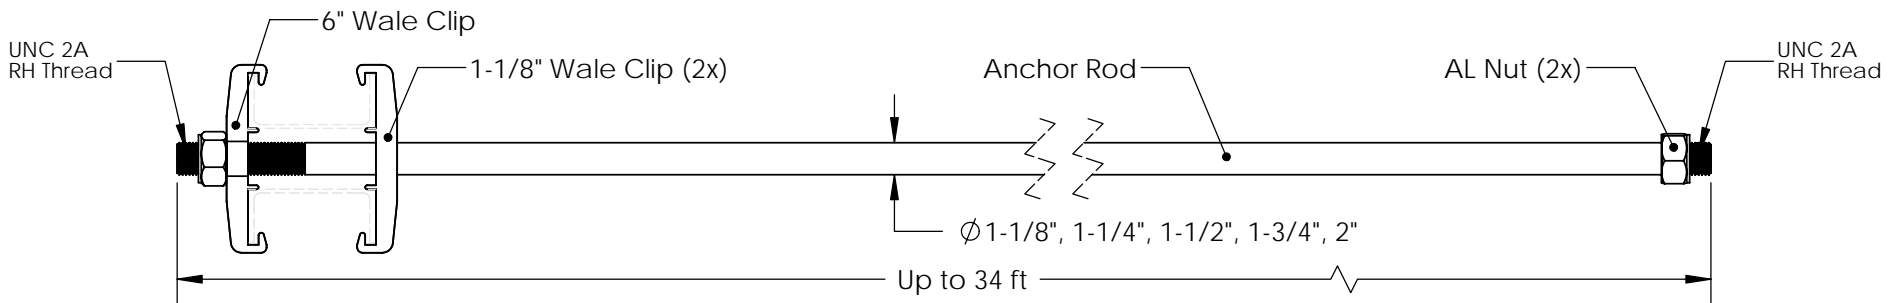

Material	6061-T6 Marine Grade Aluminum
Standard Packaging	Anchor Rod, 6" Wale Clip, 1-1/8" Wale Clip (2x), Aluminum Nut (2x)
Compatibility	WB-6 Wale, WB-8 Wale

Physical properties are defined by ASTM testing standards, The Aluminum Association Design Manual, and/or standard engineering practice. The values shown are nominal and may vary. The information found in this document is believed to be true and accurate. No warranties of any kind are made as to the suitability of any CMI product for particular applications or the results obtained there from. ShoreGuard, C-Loc, TimberGuard, GeoGuard, Dura Dock, Shore-All, and Gator Gates are registered trademarks of Crane Materials International. ArmorWare, Ultra Composite, GatorDocks, and CMI Waterfront Solutions are trademarks of Crane Materials International. United States and International Patent numbers 5,145,287; 5,881,508; 6,000,883; 6,033,155; 6,053,666; D420,154; 4,674,921; 4,690,588; 5,292,208; 6,575,667; 7,059,807; 7,056,066; 7,025,539; 1,245,061; Other patents pending. © 2007 Crane Materials International. All Rights Reserved.